


Gerade Einschraubverschraubungen NPT

Straight male adaptor fittings NPT

Racores para roscar rectos NPT

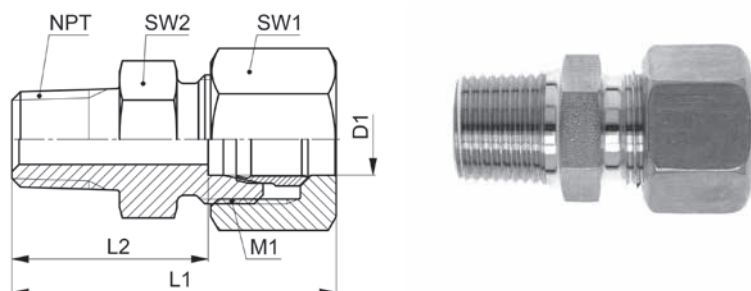

GEV-..SNPT

Type-D1 NPT	Mat.-Nr.	PN	NPT	M1	L1	L2	SW1	SW2	g/Stk
NPT=Einschraubgewinde NPT		NPT=tapered male adaptor thread NPT			NPT=rosca de conexión cónica NPT				
GEV-06SNPT 1.8	708.1102.100.30	800	1/8	14x1.5	36.0	21.0	17	14	45
GEV-06SNPT 1.4	708.1102.110.30	800	1/4	14x1.5	43.0	28.0	17	17	55
GEV-06SNPT 3.8	708.1102.120.30	800	3/8	14x1.5	43.0	28.0	17	19	70
GEV-06SNPT 1.2	708.1102.125.30	800	1/2	14x1.5	50.0	35.0	17	22	93
GEV-08SNPT 1.8	708.1102.160.30	800	1/8	16x1.5	38.0	23.0	19	17	48
GEV-08SNPT 1.4	708.1102.170.30	800	1/4	16x1.5	43.0	28.0	19	17	60
GEV-08SNPT 3.8	708.1102.180.30	800	3/8	16x1.5	43.0	28.0	19	19	74
GEV-08SNPT 1.2	708.1102.185.30	800	1/2	16x1.5	50.0	35.0	19	22	108
GEV-10SNPT 1.4	708.1102.270.30	800	1/4	18x1.5	44.0	27.5	22	19	71
GEV-10SNPT 3.8	708.1102.280.30	800	3/8	18x1.5	44.0	27.5	22	19	86
GEV-10SNPT 1.2	708.1102.285.30	800	1/2	18x1.5	51.0	34.5	22	22	104
GEV-10SNPT 3.4	708.1102.290.30	800	3/4	18x1.5	51.0	34.5	22	27	154
GEV-12SNPT 1.4	708.1102.380.30	630	1/4	20x1.5	46.0	29.5	24	22	96
GEV-12SNPT 3.8	708.1102.390.30	630	3/8	20x1.5	46.0	29.5	24	22	100
GEV-12SNPT 1.2	708.1102.400.30	630	1/2	20x1.5	51.0	34.5	24	22	121
GEV-12SNPT 3.4	708.1102.405.30	630	3/4	20x1.5	51.0	34.5	24	27	170
GEV-14SNPT 3.8	708.1102.502.30	630	3/8	22x1.5	49.0	31.0	27	24	125
GEV-14SNPT 1.2	708.1102.504.30	630	1/2	22x1.5	54.0	36.0	27	24	160
GEV-14SNPT 3.4	708.1102.506.30	630	3/4	22x1.5	54.0	36.0	27	27	180
GEV-14SNPT 1.1	708.1102.510.30	630	1	22x1.5	61.0	43.0	27	36	230
GEV-16SNPT 3.8	708.1102.564.30	630	3/8	24x1.5	49.0	30.5	30	27	152
GEV-16SNPT 1.2	708.1102.566.30	630	1/2	24x1.5	54.0	35.5	30	27	170
GEV-16SNPT 3.4	708.1102.568.30	630	3/4	24x1.5	54.0	35.5	30	27	196
GEV-16SNPT 1.1	708.1102.570.30	630	1	24x1.5	61.0	42.5	30	36	324
GEV-20SNPT 1.2	708.1102.706.30	420	1/2	30x2.0	59.0	37.5	36	32	246
GEV-20SNPT 3.4	708.1102.708.30	420	3/4	30x2.0	59.0	37.5	36	32	268
GEV-20SNPT 1.1	708.1102.712.30	420	1	30x2.0	64.0	42.5	36	36	360
GEV-25SNPT 1.2	708.1102.800.30	420	1/2	36x2.0	64.0	40.0	46	41	421
GEV-25SNPT 3.4	708.1102.805.30	420	3/4	36x2.0	64.0	40.0	46	41	474
GEV-25SNPT 1.1	708.1102.810.30	420	1	36x2.0	69.0	45.0	46	41	503
GEV-25SNPT 5.4	708.1102.815.30	420	1 1/4	36x2.0	70.0	46.0	46	46	654
GEV-25SNPT 3.2	708.1102.820.30	420	1 1/2	36x2.0	70.0	46.0	46	50	714

Fortsetzung auf nächster rechter Seite


To be continued on next right page

Continuación próxima página derecha

Gerade Einschraubverschraubungen NPT

Straight male adaptor fittings NPT

Racores para roscar rectos NPT

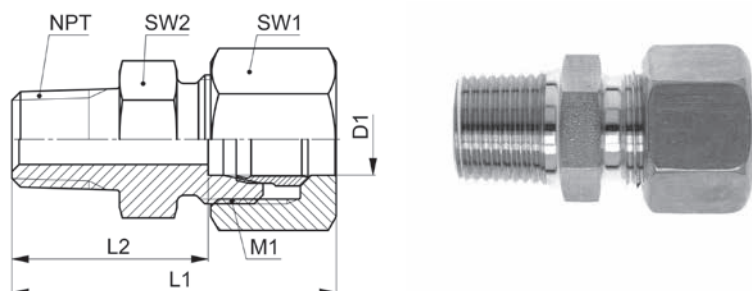

GEV-..SNPT

Type -D1 NPT	Mat.-Nr.	PN	NPT	M1	L1	L2	SW1	SW2	g/Stk
NPT=Einschraubgewinde NPT		NPT=tapered male adaptor thread NPT			NPT=rosca de conexión cónica NPT				
GEV-30SNPT 3.4	708.1102.895.30	420	3/4	42x2.0	67.0	40.5	50	46	536
GEV-30SNPT 1.1	708.1102.900.30	420	1	42x2.0	72.0	45.5	50	46	590
GEV-30SNPT 5.4	708.1102.902.30	420	1 1/4	42x2.0	73.0	46.5	50	46	650
GEV-30SNPT 3.2	708.1102.905.30	420	1 1/2	42x2.0	73.0	46.5	50	50	786
GEV-38SNPT 1.1	708.1102.960.30	420	1	52x2.0	79.0	48.0	60	55	955
GEV-38SNPT 5.4	708.1102.954.30	420	1 1/4	52x2.0	80.0	49.0	60	55	955
GEV-38SNPT 3.2	708.1102.953.30	420	1 1/2	52x2.0	80.0	49.0	60	55	935

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.